
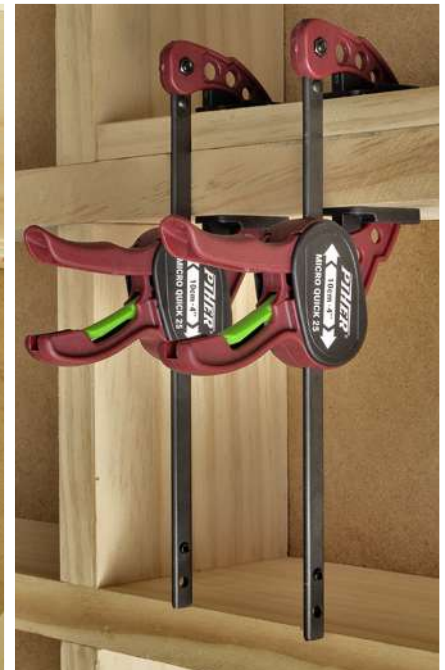


QUICK Tvinger

C. DAHM
MASKINFORRETNING AS
Nordåsdaalen 10, 5235 RÅDAL- BERGEN
Tlf 55 11 24 70 Fax 55 11 24 71
firmapost@dahm.no
www.dahm.no

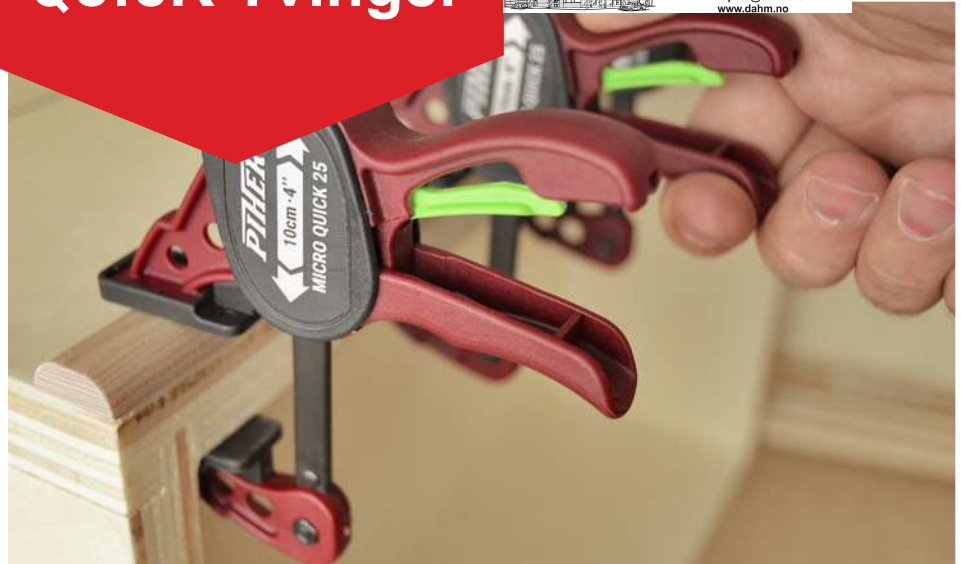

BAR 18x6 mm .74"x.24"

MAXIMUM PRESSURE


150kg · 340 lb

COD	R cm in	cm in	cm in	kg lb	
52615	17.5-32.5 6.9"-12.7"	15 6"	8 3.1"	.65 1.43	5
52630	17.5-47.5 6.9"-18.7"	30 11.8"		.76 1.68	
52645	17.5-49.0 6.9"-19.2"	45 17.7"		.88 1.94	
52660	17.5-77.5 6.9"-30.5"	60 23.6"		1.00 2.20	
52690	17.5-107.5 6.9"-42.3"	90 35.4"		1.24 2.73	
52625	17.5-142.5 6.9"-56.1"	125 50"		1.74 3.84	

- Skinne av herdet stål
- Glassfiberforsterkede kjefter

Beskyttelse over trykkfoten

COD	cm in	kg lb	
52505	7 3"	0.05 .11	2
52501	5 2"		2

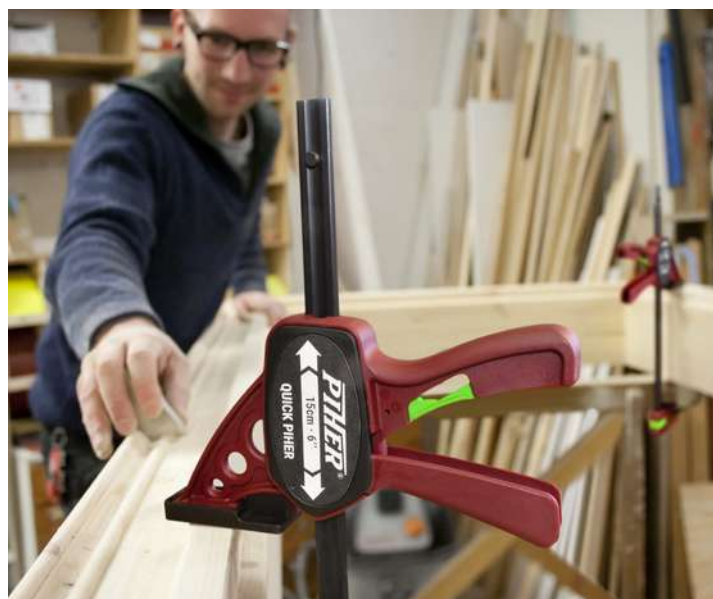

QUICK PIHER



MINI QUICK PIHER



BAR 14x4 mm .54"x.17" MAXIMUM PRESSURE 70kg · 170 lb

COD	R cm in	cm in	cm in	kg lb	
52415	12.5-27 4.9"-10.6"	15 6"	6 2.3"	.44 .97	10
52430	12.5-42 4.9"-16.5"	30 11.8"	6 2.3"	.52 1.15	

- Skinne av herdet stål
- Glassfiberforsterkede kjefter

PROTECTION CAPS SET

COD	kg lb	
52412	0.04 0.08	2



BOX OF 16X 15cm MINI QUICK PIHER

COD	kg lb	
52414	4.8 10.5	1



MICRO QUICK PIHER SET



BAR 8x3 mm .31"x.11" MAXIMUM PRESSURE 25kg · 55lb

COD	R cm in	cm in	cm in	cm in	gr lb	
52015	7.5-17.5 3"-6.8"	10 3.4"	5.5 2.1"	19 7.4"	140 0.3	4
52016	7.5-27.5 3"-10.8"	20 7.8"	5.5 2.1"	29 11.4"	200 0.4	

- Glassfiberforsterket nylon
- 8 x 3 mm Herdet karbonstål
- Reverserbar
- TPR Protection caps




T-TRACK QUICK PIHER



MAXIMUM PRESSURE 60kg · 132 lb

COD	cm	in	cm	in	kg	lb	
52101	15	6"	7	2.7"	.25	.55	10
52103	22	8.6"	7	2.7"	.29	.63	

- Fibreglass reinforced nylon jaws.
- 0.54" x 0.17" Forged and Tempered carbon steel bar.
- A Section (mm in)




PROTECTION CAPS



COD	kg	lb	
52098	0.01	.02	1

MOD. TMM

- Flat head to insert in 0.47"x0.31" grooves
- Wooden handle.
- Forged steel.
- Plastic protection cap included.




BAR 13.5 x 6.5 mm .53"x.26"

MAXIMUM PRESSURE 201kg · 443 lb

COD	cm	in	cm	in	kg	lb	
30800	12	5"	6	2.4"	.3	.66	20
30801	16	6"	6	2.4"	.33	.73	
30802	20	8"	6	2.4"	.35	.77	10
30803	30	12"	6	2.4"	.36	.79	

MOD. TPAL

- Flat head to insert in 0.47"x0.31" grooves
- Moving jaw with cranking mechanism
- Forged steel.
- Plastic protection cap included




BAR 13.5 x 6.5 mm .53"x.26"

MAXIMUM PRESSURE 167kg · 368 lb

COD	cm	in	cm	in	kg	lb	
30810	12	5"	6	2.4"	.5	1.1	20
30811	16	6"	6	2.4"	.53	1.2	
30812	20	8"	6	2.4"	.55	1.2	10
30813	30	12"	6	2.4"	.6	1.3	

LIGHT PAL

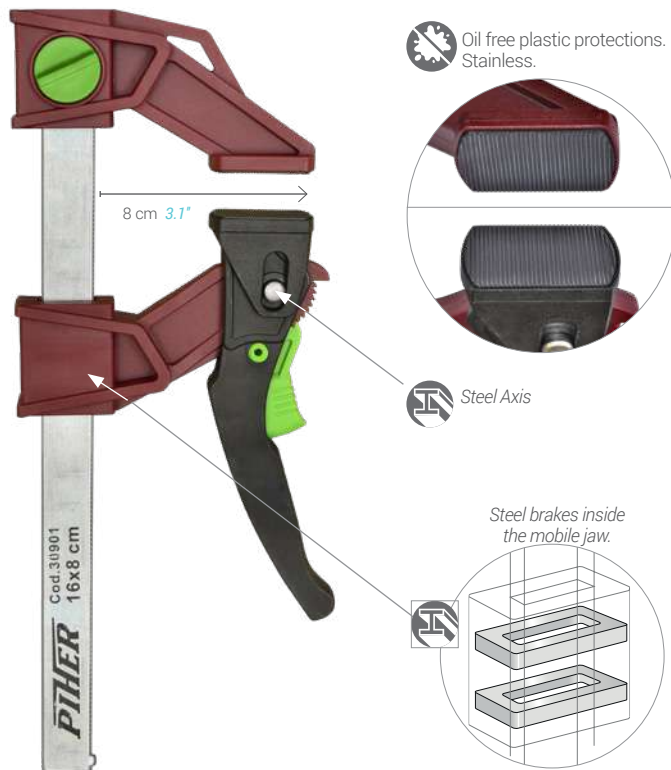

- Zinc coated bar
- Fibreglass reinforced nylon jaws.
- Two steel brake plates
- TPR Protection caps in both jaws.
- Reversible.

BAR 20x5 mm .79"x0.2" MAXIMUM PRESSURE 120kg · 264lb

COD	cm in		cm in		kg /lb		
30901	15	6"	8	3.1"	.47	1.03	10
30903	30	12"	8	3.1"	.55	1.21	



QUICK PAL ALUMINIUM



BAR 19x6.3 mm .74"x0.24" MAXIMUM PRESSURE 250kg · 560lb

COD	cm in		cm in		kg /lb		
30820	15	6"	7.5	3"	.6	1.32	5
30821	30	12"	7.5	3"	.71	1.56	

- Tempered carbon steel bar
- Aluminum jaws and lever
- Steel ratchet system
- Protection caps with loss prevention system on both jaws

AL Made in Aluminium

PROTECTION CAPS SET



COD	kg /lb	
30819	0.03 .06	2

C. DAHM
MASKINFORRETNING AS



Nordåsdaalen 10, 5235 RÅDAL- BERGEN
Tlf 55 11 24 70 Fax 55 11 24 71
firmapost@dahm.no
www.dahm.no

PHER

www.dahm.no